


### 5 PIN CONNECTOR (MOTOR)

PIN 1 = MOTOR A+  
 PIN 2 = MOTOR A-  
 PIN 3 = MOTOR B+  
 PIN 4 = MOTOR B-  
 PIN 5 = UNUSED

### CONNECTOR PINOUT

PIN1 = MOTOR A+  
 PIN 3 = +5Vdc  
 PIN 6 = MOTOR B+  
 PIN 7 = MOTOR A-  
 PIN 8 = FAR LIMIT  
 PIN 11 = MOTOR B-  
 PIN 12 = NEAR LIMIT  
 PIN 13 = COMMON




15 PIN HD FEMALE D-SUB

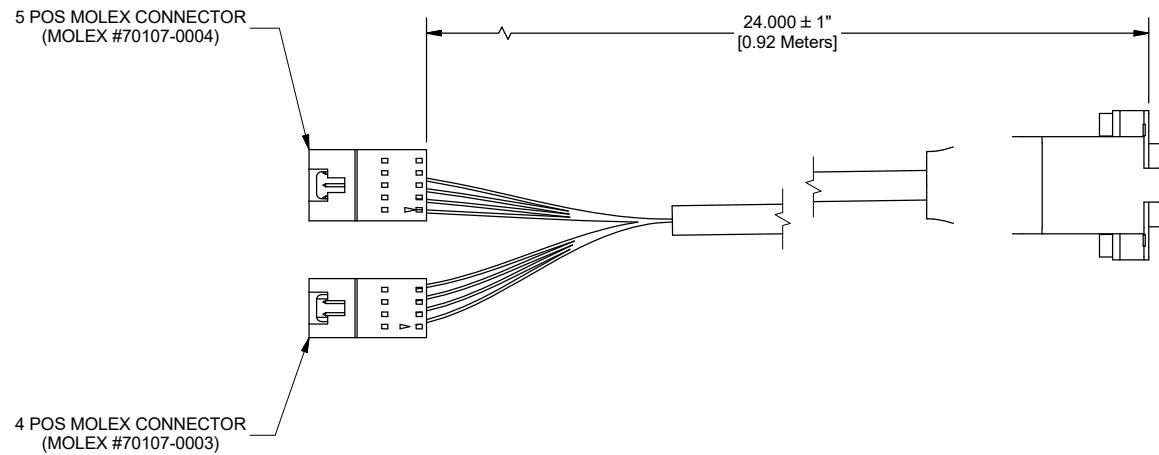

### 4 PIN CONNECTOR (SENSOR)

PIN 1 = COMMON  
 PIN 2 = FAR LIMIT  
 PIN 3 = +5Vdc  
 PIN 4 = NEAR LIMIT

## OUTLINE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVITAR. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NAVITAR IS PROHIBITED.		 ROCHESTER, NEW YORK	
SCALE:	1:1			CABLE HARNESS, 2PH MTR D-SUB, 24"	
WEIGHT:	9.22 g	Tolerance = +/- 1"		SIZE	PART NUMBER
DR BY:	K. Arnold			B	1-40283
CH BY:	R. PODLENA				REV
PROJECT #:	E3496				A
DATE DR:	4/21/2017				